

# DECTOP LED MR16




- **DECTOP-3W**
- **DECTOP-6W**

## Product Description



- Energy saving & ECO-friendly.
- No UV radiation
- Lead-free, Mercury-Free.
- Light in weight.
- Life time 30,000 hrs.
- Non-Dimmable.
- Low temperature.
- PBT Thermal conductive plastic case.
- Easy to install.
- Contain with innocuous material as RoHS certified.

## Light Distribution Curve

### DECTOP-3W

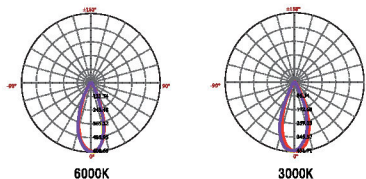

### DECTOP-6W

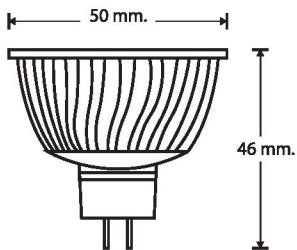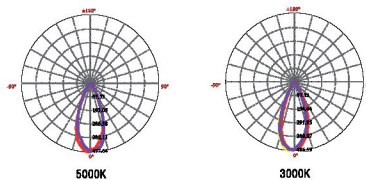

Product Dimension

Product Code	DECTOP_GU5.3/3W/6K/25	DECTOP_GU5.3/3W/3K/25	DECTOP_GU5.3/6W/6K/30	DECTOP_GU5.3/6W/3K/30
Input Voltage	AC12V 50Hz/DC12V	AC12V 50Hz/DC12V	AC12V 50Hz/DC12V	AC12V 50Hz/DC12V
Power	3W	3W	6W	6W
Lamp Luminous Flux	235 lm	220 lm	345 lm	330 lm
Color	6000K	3000K	6000K	3000K
Illuminance at 2m.	105 lux	65 lux	238 lux	235 lux
Illuminance at 4m.	26 lux	24 lux	57 lux	54 lux
Illuminance at 6m.	11 lux	9 lux	23 lux	19 lux
Illuminance at 8m.	6 lux	5 lux	13 lux	11 lux
Color Rendering Index	82	82	82	82
Beam Angle	40 °	40 °	30 °	30 °
Operation Temperature	-10 °C ~ 45 °C	-10 °C ~ 45 °C	-10 °C ~ 45 °C	-10 °C ~ 45 °C
Base	GU5.3	GU5.3	GU5.3	GU5.3